



RT202180



RA430100:

Storage container with lid, anthracite

**built-under fridge with freezer section 200 series**  
**82 x 59.8 cm, soft close flat hinge**

**RT202180**

Interior with solid elements in light satin aluminium  
 Height-adjustable safety glass shelf with aluminium profile  
 Warm white and glare-free LED light  
 Drawer with solid aluminium handle, close to 0 °C  
 Cushioned door closing system allowing a soft and controlled door closure  
 Total volume: 110 litres.

#### Handling

LED electronic with touch control.

#### Technical features

Cushioned door closing system from 20° door opening angle, integrated in door hinge.  
 Open-door alarm.  
 Holiday mode.  
 Rest mode.

#### Selected digital services (Gaggenau Home Connect)

Remote control and monitoring.  
 Remote diagnostics.

#### Cooling

Fast cooling.  
 Temperature adjustable from +2 °C to +6 °C.  
 1 height-adjustable safety glass shelf with aluminium profile.  
 1 drawer with solid aluminium handle, close to 0 °C, ideal for meat, fish and poultry.  
 1 bottom compartment with sliding glass lid.  
 1 large aluminium door rack for bottles, extra deep.  
 1 height-adjustable aluminium door rack.  
 1 adjustable door rack, small.  
 Warm white interior lighting (3500 K) with integrated glare-free LED side light.  
 Total volume of all refrigerator compartments: 93 litres.

#### Freezing

Storage temperature -18 °C and lower.  
 4-star freezer compartment.  
 Freezing capacity 3 kg /24 h.  
 Storage time after a malfunction 9 h.  
 Total volume of freezer compartment: 17 litres.

#### Consumption data


Energy efficiency class D at a range of energy efficiency classes from A to G.  
 Energy consumption 119 kWh/year.  
 Noise level 35 dB (A) re 1 pW.

#### Planning notes

Flat hinge.  
 Door hinge right, reversible.  
 Door opening angle of 115°, fixable at 90°.  
 Max. door panel weight 12 kg.  
 Height-adjustable feet.  
 The enclosed ventilation grille must be used.  
 The mains socket needs to be planned outside the built-in niche.

#### Connection

Connecting cable 2.3 m with plug.

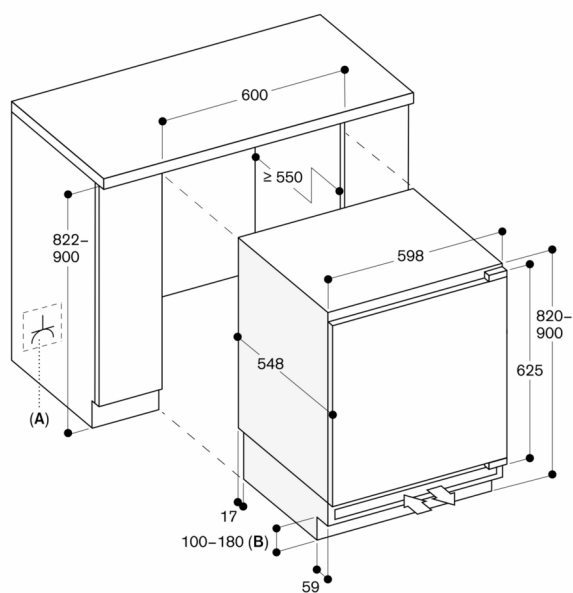

A: Socket

B: Base height:

- 100 mm when niche height is 822 mm
- 180 mm when niche height is 900 mm

Measurements in mm