



RT200203



RA430100:

Storage container with lid, anthracite

200 series

82 x 60 cm, soft close flat hinge

RT200203

Cushioned door closing system allowing a soft and controlled door closure

Total volume: 123 litres

Technical features

Automatic defrosting with defrost water evaporation.

Cushioned door closing system from 20° door opening angle, integrated in door hinge.

Cooling

2 safety glass shelves, 1 of which height adjustable.

1 pull-out drawer.

1 vegetable compartment.

1 large door rack for bottles.

2 door racks.

Bright interior LED lighting.

Volume 108 litres.

Freezing

Storage temperature -18 °C and lower.

4-star freezer compartment.

Freezing capacity 3.4 kg /24 h.

Storage time after a malfunction 8 h.

Total volume of freezer compartment: 15 litres.

Consumption data

Energy efficiency class F at a range of energy efficiency classes from A to G.

Energy consumption 180 kWh/year.

Noise level 38 dB (A) re 1 pW.

Planning notes

Flat hinge.

Door hinge right, reversible.

Door opening angle of 115°, fixable at 90°.

Max. door panel weight 19 kg.

Height-adjustable feet.

Plinth height for niche height of 820 mm: 100 - 170 mm.

Plinth height for niche height of 870 mm: 150 - 220 mm.


The enclosed ventilation grille must be used.

The mains socket needs to be planned outside the built-in niche.

Connection

Total connected load 0.090 KW.

Connecting cable 2.3 m with plug.

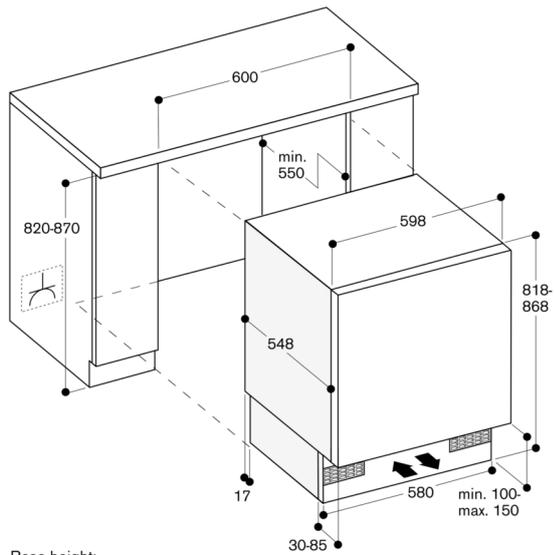

Base height:
- 100 mm when niche height is 820 mm
- 150 mm when niche height is 870 mm

