



RC202180

RA430100:

Storage container with lid, anthracite

built-under fridge 200 series
82 x 59.8 cm, soft close flat hinge
RC202180

Interior with solid elements in light satin aluminium
Height-adjustable safety glass shelves with aluminium profile
Warm white and glare-free LED light
Drawer with solid aluminium handle, close to 0 °C
Cushioned door closing system allowing a soft and controlled door closure
Total volume: 134 litres.

Handling

LED electronic with touch control.

Technical features

Cushioned door closing system from 20° door opening angle, integrated in door hinge.
Open-door alarm.
Holiday mode.
Rest mode.

Selected digital services (Gaggenau Home Connect)

Remote control and monitoring.
Remote diagnostics.

Cooling

Fast cooling.
Temperature adjustable from +2 °C to +6 °C.
2 height-adjustable safety glass shelves with aluminium profile.
1 drawer with solid aluminium handle, close to 0 °C, ideal for meat, fish and poultry.
1 bottom compartment with sliding glass lid.
1 large aluminium door rack for bottles, extra deep.
1 height-adjustable aluminium door rack.
1 adjustable door rack, small.
Warm white interior lighting (3500 K) with integrated glare-free LED side light.
Total volume of all refrigerator compartments: 134 litres.

Consumption data


Energy efficiency class E at a range of energy efficiency classes from A to G.
Energy consumption 93 kWh/year.
Noise level 35 dB (A) re 1 pW.

Planning notes

Flat hinge.
Door hinge right, reversible.
Door opening angle of 115°, fixable at 90°.
Max. door panel weight 12 kg.
Height-adjustable feet.
The enclosed ventilation grille must be used.
The mains socket needs to be planned outside the built-in niche.

Connection

Connecting cable 2.3 m with plug.

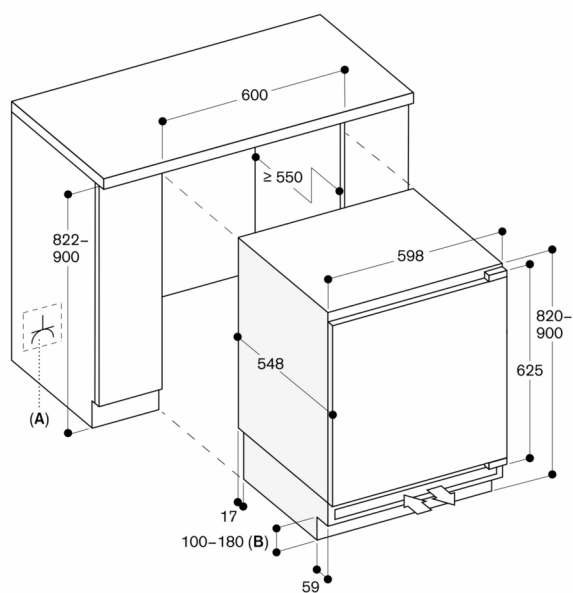

A: Socket

B: Base height:

- 100 mm when niche height is 822 mm
- 180 mm when niche height is 900 mm

Measurements in mm